SHIP 150 cm

BATHTUB IN NOVOTECH - INTERIOR BIANCO OPACO, EXTERIOR CUSTOMISABLE. UNIT COMBINED WITH TOP IN OCRITECH BIANCO AND CUSTOMISABLE COLOUR.

Dimensions		Capacity	Furniture installation	Code	External bathtub finish		Furniture finish					
Cm	н	lt.					Wood finish					
					Matt White	Colour choice	Matt White	White wood	Grain	Burlington	Wenge	Colour choice
STANDARD												
					U	*	U	ı	M	N	V	*
150 x 70	62	265	-	SHI115070-			-	-	-	-	-	-
STANDARD	STANDARD - FURNITURE WITH MIXER								•	6		
					U	*	U	I	M	N	V	+
150 x 70	62	265	freestanding	SHI1150702CS-								
150 x 70	62	265	center of the wall	SHI1150702CP-								
150 x 70	62	265	right corner	SHI1150702AD-								
150 x 70	62	265	left corner	SHI1150702AS-								
NATURAL A	NATURAL AIR - FURNITURE WITH MIXER								4	() LED	
					U	*	U	ı	M	N	V	*
150 x 70	62	265	freestanding	SHIN1507002CS-								
150 x 70	62	265	center of the wall	SHIN1507002CP-								
150 x 70	62	265	right corner	SHIN1507002AD-								
150 x 70	62	265	left corner	SHIN1507002AS-								

OPTIONAL: EXTERNAL LED LIGHT AND FLOOR-STANDING TAP, SEE PAGE 94









BATHTUB UNIT: TECHNOLOGY AND AESTHETIC APPEAL

The unit is the ideal pratical addition to the bathtub. Fitted with a simple and functional tap design, it houses all the technological elements. A variety of finishes can be chosen or colour to match the bathtub.



DESIGN AND TECHNOLOGY - NATURAL AIR

Lie back and let the micro bubbles envelop and silently caress your body, oxygenating your skin. The pleasure of a massage, immersed in a beautifully designed bathtub. From the taps to the bathtub unit, your new bathroom project is fully coordinated in terms of colour, shape and materials.



FUNCTIONS AND FEATURES

(available according to the equipment)



Natural air



Internal white Led light



Taps and fittings on side of bathtub



Drainage system with click-clack plug.

THTUB WITH INTEGRATED OVERFLOW MPLIANT WITH CURRENT REGULATIONS




SHIP 160 cm

BATHTUB IN NOVOTECH - INTERIOR BIANCO OPACO, EXTERIOR CUSTOMISABLE. UNIT COMBINED WITH TOP IN OCRITECH BIANCO AND CUSTOMISABLE COLOUR.

Dimensions		Capacity	Furniture installation	Code	External bathtub finish		Furniture finish					
Cm	Н	lt.							Wood	d finish		
					Matt White	Colour choice	Matt White	White wood	Grain	Burlington	Wenge	Colour choice
STANDARD												
					U	*	U	ı	M	N	V	*
160 x 70	62	280	-	SHI116070-			-	-	-	-	-	-
STANDARD	STANDARD - FURNITURE WITH MIXER										•	
					U	*	U	I	M	N	V	+
160 x 70	62	280	freestanding	SHI1160702CS-								
160 x 70	62	280	center of the wall	SHI1160702CP-								
160 x 70	62	280	right corner	SHI1160702AD-								
160 x 70	62	280	left corner	SHI1160702AS-								
NATURAL A	NATURAL AIR - FURNITURE WITH MIXER								4	()) LED	
					U	*	U	I	M	N	V	+
160 x 70	62	280	freestanding	SHIN1607002CS-								
160 x 70	62	280	center of the wall	SHIN1607002CP-								
160 x 70	62	280	right corner	SHIN1607002AD-								
160 x 70	62	280	left corner	SHIN1607002AS-								

OPTIONAL: EXTERNAL LED LIGHT AND FLOOR-STANDING TAP, SEE PAGE 94

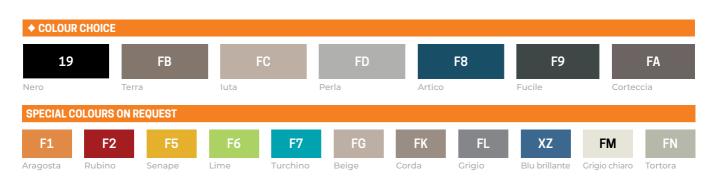





OPTIONAL INFINITIVE-SHIP



FLOOR-STANDING TAP

Finishing	Code
Chrome	RUBPVASRSN-K
Matt Black	RUBPVASRSN-H



LOWER PERIMETER LED KIT FOR INFINITIVE BATHTUB

Code KLINF

LOWER PERIMETER LED KIT FOR SHIP BATHTUB


Dimensions (cm)	Code
150	KLSHI150
160	KLSHI160





TAPS AND FITTINGS ON SIDE OF BATHTUB FOR UNIT


Finishing	Code
Matt Black	RUBBVASRSN-H

























































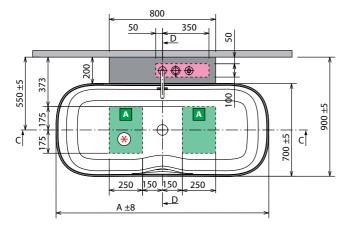







* Area for the preparation of electrical connection in the case of perimeter light for the bathtub. Plan remote control for switching on and off (not supplied).

MODEL	Α	В	С	D	WEIGHT	CAPACITY IN LITRES
Ship 150	1500 mm	1280 mm	900 mm	1650 mm	105 kg	265 lt
Ship 160	1600mm	1380 mm	950 mm	1750 mm	115 kg	280 lt





HYDRAULIC SPECIFICATIONS

1 Natural Air jet Siphon with 40 mm attachment

ELECTRICAL SPECIFICATIONS

Current 220-230 V Frequency 50 Hz Maximum absorbed power: Natural Air: 1050 W Install a 30mA residual-current device upstream with an omnipolar switch with minimum of \geq 3 mm between the contacts.